

# RabbitCore<sup>®</sup> RCM4100 Series

Microprocessor Core Module

A compact core module ideal for device control for embedded applications that require I/O control, data handling and peripheral connectivity.



## Overview

The RabbitCore RCM4100 series is the entry platform for the Rabbit<sup>®</sup> 4000 family of core modules. The RCM4100 is designed to mount directly to a user-supplied motherboard and acts as the microprocessor of the embedded system. The microprocessor features 40 GPIO lines shared with up to six CMOS-compatible serial ports, and four levels of alternate pin functions that include variable phase PWM, quadrature decoder, and input capture.

The RCM4100 series, with its robust feature set, ample memory, low-power modes and analog channels, is available for multiple peripheral connectivity options such as a cellular modem or ZigBee device.


Evaluation of the RCM4100 is easy with the RabbitCore RCM4100 development kit, which provides all the necessary hardware and software to quickly get started.

## Development Kit

This low-cost development kit includes everything you need to begin development.



## Application Highlight

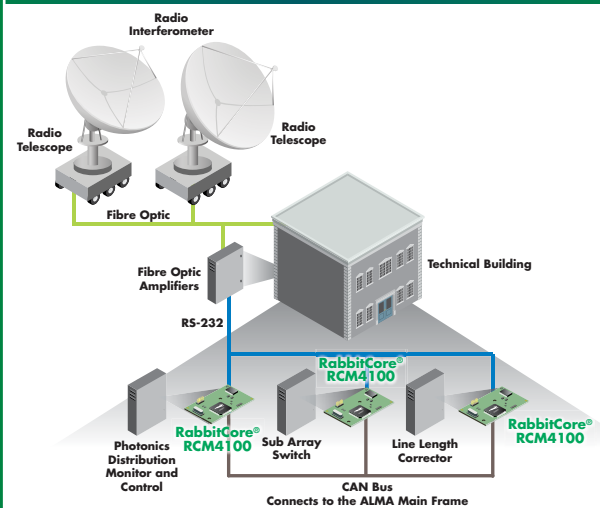

**Potential Applications:** Device-level control, remote data logging, asset management, security access systems, wireless device/data management

## Features/Benefits

- Rabbit 4000 running up to 59 MHz
- 512K Flash, 256K / 512K Data SRAM
- Up to 40 GPIO, up to 6 CMOS-compatible serial ports
- Auxiliary I/O feature for reducing processor bus loading
- 8 channels 12-bit A/D converter (RCM4100)
- Ideal for device intelligence and control
- Well suited for easy integration with peripheral technologies such as GPS, cellular modems, RFID readers, sensors, etc.

Specifications	RCM4100	RCM4110	RCM4120
<b>Features</b>			
Microprocessor	Rabbit® 4000 at 59 MHz	Rabbit® 4000 at 29 MHz	Rabbit® 4000 at 59 MHz
Flash Memory	512K		
Data SRAM	512K	256K	512K
Fast Program-Execution SRAM	512K	None	512K
Backup Battery	Connection for user-supplied backup battery (to support RTC and data SRAM)		
General Purpose I/O	29 parallel digital I/O lines: • Configurable with 4 layers of alternate functions	40 parallel digital I/O lines: • Configurable with 4 layers of alternate functions	
Additional Inputs	Startup mode (2), reset in, CONVERT	Startup mode (2), reset in	
Additional Outputs	Status, reset out, analog VREF	Status, reset out	
Analog Inputs • A/D Converter Resolution	8 channels single-ended or 4 channels differential. Programmable gain 1, 2, 4, 5, 8, 10, 16 and 20 V/V	None	None
• A/D Converter Resolution	12 bits (11 bits single-ended)		
• A/D Conversion Time (including 120 µs raw count and Dynamic C	180 µs		
Auxiliary I/O Bus	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write		
Serial Ports	6 high-speed, CMOS-compatible ports: • All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC • 1 asynchronous clocked serial port shared with programming port • 1 clocked serial port shared with A/D converter	6 high-speed, CMOS-compatible ports: • All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC • 1 asynchronous clocked serial port shared with programming port	
Serial Rate	Maximum asynchronous baud rate = CLK/8		
Slave Interface	Slave port allows the RCM4100 to be used as an intelligent peripheral device slaved to a master processor		
Real Time Clock	Yes		
Timers	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers		
Watchdog/Supervisor	Yes		
Pulse-Width Modulators	4 channels synchronized PWM with 10-bit counter; 4 channels variable-phase or synchronized PWM with 16-bit counter		
Input Capture	2-channel input capture can be used to time input signals from various port pins		
Quadrature Decoder	2-channel quadrature decoder accepts inputs from external incremental encoder modules		
Power (pins unloaded)	3.0– 3.6VDC		
	125 mA @ 3.3V	65 mA @ 3.3V	125 mA @ 3.3V
Operating Temperature	-40° C to +85° C	0° C to +70° C	-40° C to +85° C
Humidity	5% to 95%, non-condensing		
Connectors	One 2 × 25, 1.27 mm pitch IDC signal header; One 2 × 5, 1.27 mm pitch IDC programming header		
Board Size	1.41" × 1.88" × 0.49" (36 mm × 48 mm × 12 mm)		
<b>Features</b>			
Part Number	20-101-1105	20-101-1093	20-101-1154
Development Kit Part Number	101-1158	None	None

You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support)

91001605  
B5/415

Digi International  
Worldwide HQ  
877-912-3444  
952-912-3444  
[www.digi.com](http://www.digi.com)

Digi International  
France  
+33-1-55-61-98-98  
[www.digi.fr](http://www.digi.fr)

Digi International  
Japan  
+81-3-5428-0261  
[www.digi-intl.co.jp](http://www.digi-intl.co.jp)

Digi International  
Singapore  
+65-6213-5380

Digi International  
China  
+86-21-50492199  
[www.digi.com.cn](http://www.digi.com.cn)



[www.digi.com](http://www.digi.com)