


5690.3

RS-SP 2 2000 mm OG

RS-SP 2 2000 mm OG

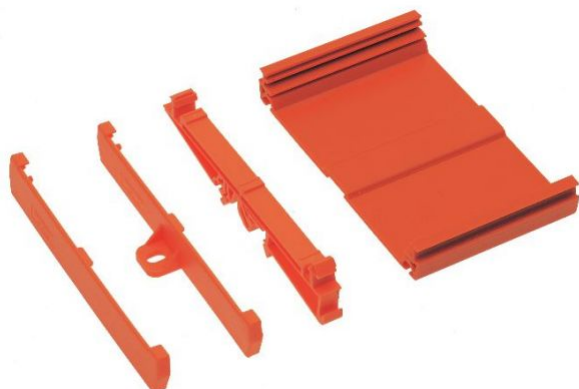

Extruded profile for locking base system, length: 2000 mm, lower part, width: 119 mm, PCB width: 100 or 108 mm, colour: orange, Note: required profile length = PCB length - 4.5 mm

Business data

Product description	Extruded profile
Packaging unit	1
Quantity unit	M
Weight per piece (not including packaging)	490
Weight per piece (including packaging)	490
Unit of weight	G
Customs number	39162000
Country of origin	DE

5690.3

RS-SP 2 2000 mm OG

RS-SP 2 2000 mm OG

Technical Data

Dimensions

Length	2000 mm
Width	119 mm
Height	17 mm

Materials

Material	PVC
Flammability class UL 94	V-0
Working temperature, min.	-50 °C
Working temperature, max.	60 °C

Further technical data

Required profile length = PCB length	-4.5 mm
Min. PCB thickness	1.3 mm
Max. PCB thickness	1.7 mm
Min. PCB width of upper level	108 mm
Max. PCB width of upper level	109 mm
Min. PCB width of lower level	99.5 mm
Max. PCB width of lower level	100.5 mm