

Surface Mount Thick Film Resistors
RK73 Series, Specifications



Part Number Determination


RK73B2BLTD102J					
RK73B	2B	L	TD	102	J
SERIES	SIZE	TERMINATION	PACKAGING	RESISTANCE	TOLERANCE
RK73B=Genl Purp 2% / 5% Thick Film Resistor	1H=0201 1E=0402 1J=0603 2A=0805	X=AgPd** G=Au* L=SnPb (Tin/Lead) T=Sn (100% Tin)	TB=2mm pitch, pressed paper (0201 only) TP=2mm pitch, punch paper (0402 & 0603 only) TD=7" paper tape TDD=10" paper tape TE=7" embossed plastic tape TED=10" embossed plastic tape	For 2%/5%= 2 significant digits + 1 multiplier For 0.5%/1%= 3 significant digits + 1 multiplier For jumper =blank	D=±0.5% F=±1% G=±2% J=±5% For Jumper=Blank
RK73H=Precision 0.5% / 1% Thick Film Resistor	2B=1206 2E=1210 2H=2010	**=1J, 2A, 2B only *=1E & 1J only			
RK73Z=Zero Ohm Jumper	3A=2512				

Electrical Characteristics

Series	RK73B1H RK73Z (0201)	RK73H1E RK73B1E RK73Z (0402)		RK73H1J RK73B1J RK73Z (0603)		RK73H2A RK73B2A RK73Z (0805)		RK73H2B RK73B2B RK73Z (1206)		RK73H2E RK73B2E RK73Z (1210)		RK73B2H RK73Z (2010)		RK73B3A RK73Z (2512)		
Power Rating @ 70°C	50mW	63mW		100mW		125mW		250mW		500mW 330mW		750mW		1000mW		
T.C.R. (ppm/°C) Max.	200	100	200	400	100	200	400	100	200	400	100	200	400	200	400	
Resistance Range E24 5%	1Ω-10MΩ	10-10M	1.0-9.1	10-1M	1.0-9.1, 1.1M-10M	10-1M	1.0-9.1, 1.1M-10M	10-5.6M	1.0-9.1, 6.2M-22M	10-5.6M	1.0-9.1, 6.2M-10M	10-5.6M	1.0-9.1, 6.2M-10M	10-5.6M	1.0-9.1, 6.2M-10M	
Resistance Range E96 1%		10-1M		10-1M	1.0-9.76, 1.0M-10M	10-1M	1.0-9.76, 1.0M-10M	10-1M	1.02M-5.6M	1.0-9.76, 5.6M-10M	10-1M	1.02M-5.6M	1.0-9.76, 5.6M-10M			
Absolute Max Working Volt	25V	50V				150V		200V								
Absolute Max Overload Volt	50V	100V				300V		400V								
Operating Temp Range	-55 ~ +125°C				-55 ~ +155°C											
Zero ohm Jumper																
Max Continuous Current @ 70°C	0.5A	1.0 Amps				2.0 Amps										
Max Surge Current @ 70°C	1.0A	2 Amp Max for < 1 second				5 Amp Max for < 1 second		10 Amp Max for < 1 second								
Max Resistance	50MΩ															
Operating Temp. Range	-55° ~ +125°C															

Land Pattern (mm)

Size Code	Component Size	A	B	C	D
1H (0201)	0.6X0.3	0.3	0.9	0.45	0.3
1E (0402)	1.0X0.5	0.5	1.5	0.6	0.5
1J (0603)	1.6X0.8	0.8	2.6	0.8	0.9
2A (0805)	2.0X1.25	1.2	3.0	1.2	0.9
2B (1206)	3.2X1.6	2.2	4.2	1.5	1.0
2E (1210)	3.2X2.5	2.2	4.2	2.4	1.0
2H (2010)	5.0X2.5	3.3	6.1	2.4	1.4
3A (2512)	6.4X3.2	4.4	8.0	3.0	1.8

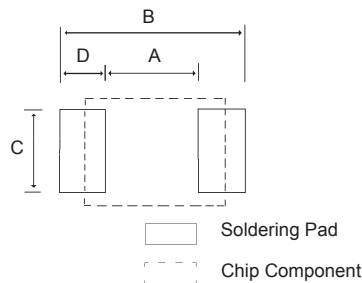

Mfg Specs

- Go to www.garrettelec.com
- Enter part number or find by description
- Select "S", select "manufacturer's specifications"


Surface Mount Thick Film Resistors
RK73 Series, Specifications & Pricing



Package Dimensions (in/mm)

Size	L	W	c	d	t	EIA Size
1H (0201)	.024±.001 0.6±0.03	.012±.001 0.3±0.03	.004±.002 0.1±0.05	.006±.002 0.15±0.05	.009±.001 0.23±0.03	0502
1E (0402)	.039±.004-.002 1.0+0.1-0.05	.02±.002 0.5±0.05	.008±.004 0.2±0.1	0.1+.002-.004 0.25+0.05+0.1	0.14±.002 0.35±0.05	1005
1J (0603)	0.63±.008 1.6±0.2	0.31±.004 0.8±0.1	0.12±.004 0.3±0.1	0.12±.004 0.3±0.1	0.18±.004 0.45±0.1	1608
2A (0805)	.079±.008 2.0±0.2	0.49±.004 1.25±0.1	0.16±.008 0.4±0.2	.012+.008-.004 0.3+0.2-0.1	.02±.004 1.5±0.1	2012
2B (1206)	.126±.008 3.2±0.2	0.63±.008 1.6±0.2	0.2±0.12 0.5±0.3	0.16+.008-.004 0.4+0.2-0.1	0.24±.004 0.6±0.1	3216
2E (1210)		.102±.008 2.6±0.2				3225
2H (2010)	.197±.008 5.0±0.2	.098±.008 2.5±0.2				5025
3A (2512)	.248±.008 6.3±0.2	.122±.008 3.1±0.2				6332

Construction

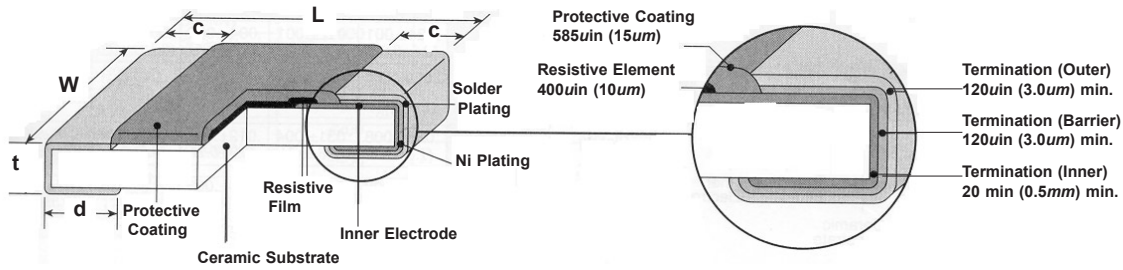

Mfg Specs

- Go to www.garrettelec.com
- Enter part number or find by description
- Select "S", select "manufacturer's specifications"