## Type BLR-510 Fuse Block 10 Pole – Regular Auto Blade




www.optifuse.com (0

(619) 593-5050

Specifications: Voltage: 32 VDC Max Current Rating: 30A per Circuit - 100A Max Input Fuse Type: Regular Auto Blade – APR / ANR Base: PBT (UL flame: 94V-0), Black Cover: PC (UL flame: 94V-2), Transparent Push Button: POM (White) Terminals: Copper, Tin plated Temperature Rating: -20° C ~ +85° C

## Mechanical Dimensions: Inches [mm]

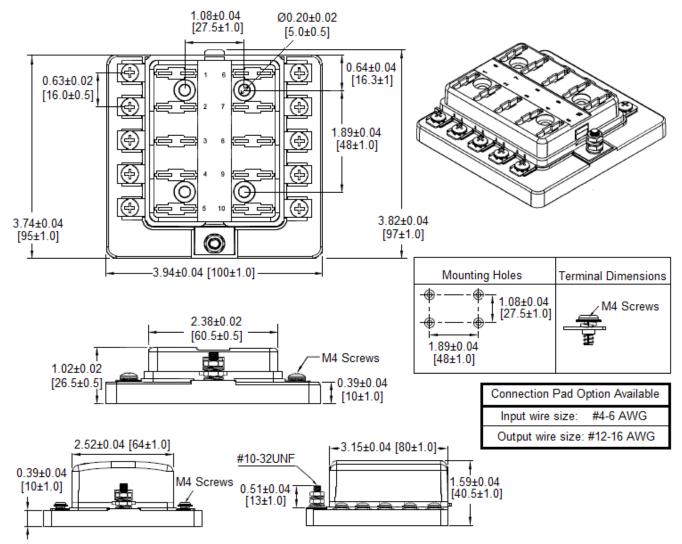

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.