

Dual-Channel, 14-Bit CCD Signal Processor with *Precision Timing*[™] Core

AD9973

FEATURES

1.8 V analog and digital core supply voltage
Serial data link with reduced range LVDS outputs
Correlated double sampler (CDS) with -3, 0, +3, +6 dB gain 6 dB to 42 dB, 10-bit variable gain amplifier (VGA)
14-bit, 65 MHz A/D converter
Black level clamp with variable level control
Complete on-chip timing generator
Precision Timing core with 240 ps resolution @ 65 MHz
On-chip 3 V horizontal and RG drivers
6 mm × 6 mm, 84-ball CSP_BGA package

APPLICATIONS

Professional HDTV camcorders Professional, high-end digital cameras Broadcast cameras Industrial high speed cameras


GENERAL DESCRIPTION

The AD9973 is a highly integrated dual channel CCD signal processor for high speed digital video camera applications. Each channel is specified at pixel rates of up to 65 MHz, and consists of a complete analog front end with A/D conversion combined with a programmable timing driver. The *Precision Timing* core allows adjustment of high speed clocks with 240 ps resolution at 65 MHz operation. The AD9973 also contains a reduced range LVDS interface for the dual channel data outputs.

Each analog front end includes black level clamping, CDS, VGA, and a 65 MSPS, 14-bit A/D converter. The timing driver provides the high speed CCD clock drivers for RG, HL, and H1 to H4. Operation is programmed using a 3-wire serial interface.

Packaged in a space-saving 6 mm \times 6 mm, 84-ball CSP_BGA package, the AD9973 is specified over an operating temperature range of -25° C to $+85^{\circ}$ C.

FUNCTIONAL BLOCK DIAGRAM

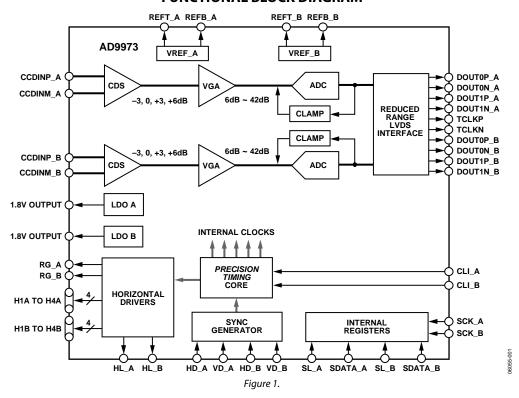

For more information about the AD9971, contact Analog Devices via email at afe.ccd@analog.com.

NOTES