

National Semiconductor is now part of  
Texas Instruments.

Search <http://www.ti.com/> for the latest technical  
information and details on our current products and services.



T-58-11-13

## LM341, LM78MXX Series 3-Terminal Positive Voltage Regulators

### General Description


The LM341 and LM78MXX series of three-terminal positive voltage regulators employ built-in current limiting, thermal shutdown, and safe-operating area protection which makes them virtually immune to damage from output overloads.

With adequate heatsinking, they can deliver in excess of 0.5A output current. Typical applications would include local (on-card) regulators which can eliminate the noise and degraded performance associated with single-point regulation.


### Features

- Output current in excess of 0.5A
- No external components
- Internal thermal overload protection
- Internal short circuit current-limiting
- Output transistor safe-area compensation
- Available in TO-220, TO-39 and TO-202 packages
- Output voltages of 5V, 6V, 8V, 12V, 15V, and 24V


### Connection Diagrams

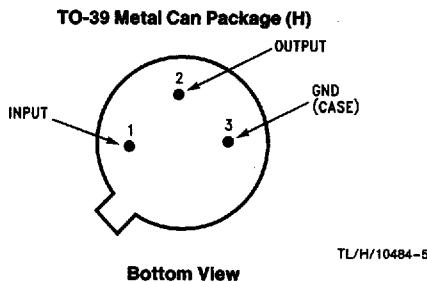

Order Number LM78M05CH, LM78M06CH, LM78M08CH,  
LM78M12CH, LM78M15CH or LM78M24CH  
See NS Package Number H03B

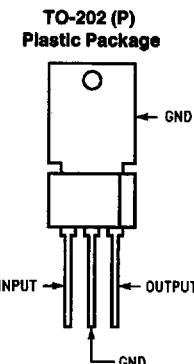

Order Number LM341P-5.0, LM341P-12 or LM341P-15  
See NS Package Number P03A

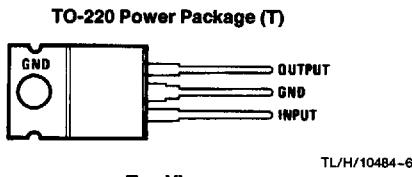

Order Number LM78M05CT, LM78M06CT, LM78M08CT,  
LM78M12CT, LM78M15CT, LM78M24CT,  
LM341T-5.0, LM341T-12 or LM341T-15  
See NS Package Number T03B

**DUAL MARKING:** The LM341T-5.0 and the LM78M05CT parts are "dual marked" (these parts are marked with both part numbers) because they have the same specifications. The same is true for the LM341T-12/LM78M12CT and the LM341T-15/LM78M15CT part number sets.

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Lead Temperature (Soldering, 10 seconds)

TO-39 Package (H)	300°C
TO-220 Package (T)	260°C
TO-202 Package (P)	230°C

**NATL SEMICOND (LINEAR)**

Storage Temperature Range	-65°C to +150°C
Operating Junction Temperature Range	-40°C to +125°C
Power Dissipation (Note 2)	Internally Limited
Input Voltage	
$5V \leq V_O \leq 15V$	35V
$V_O = 24V$	40V
ESD Susceptibility	TBD

**Electrical Characteristics**

Limits in standard typeface are for  $T_J = 25^\circ C$ , and limits in **boldface** type apply over the  $-40^\circ C$  to  $+125^\circ C$  operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods.

**LM341-5.0, LM78M05C** Unless otherwise specified:  $V_{IN} = 10V$ ,  $C_{IN} = 0.33 \mu F$ ,  $C_O = 0.1 \mu F$

Symbol	Parameter	Conditions		Min	Typ	Max	Units
$V_O$	Output Voltage	$I_L = 500 \text{ mA}$		4.8	5.0	5.2	V
		$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$ $P_D \leq 7.5W, 7.5V \leq V_{IN} \leq 20V$		<b>4.75</b>	<b>5.0</b>	<b>5.25</b>	
$V_R$ LINE	Line Regulation	$7.2V \leq V_{IN} \leq 25V$	$I_L = 100 \text{ mA}$			50	mV
			$I_L = 500 \text{ mA}$			100	
$V_R$ LOAD	Load Regulation	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				100	
$I_Q$	Quiescent Current	$I_L = 500 \text{ mA}$			4	10.0	mA
$\Delta I_Q$	Quiescent Current Change	$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$				0.5	
		$7.5V \leq V_{IN} \leq 25V, I_L = 500 \text{ mA}$				1.0	
$V_n$	Output Noise Voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$			40		$\mu V$
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 120 \text{ Hz}, I_L = 500 \text{ mA}$			78		dB
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 500 \text{ mA}$		7.2			V
$\Delta V_O$	Long Term Stability	$I_L = 500 \text{ mA}$				<b>20</b>	mV/khrs

## NATL SEMICOND (LINEAR)

**Electrical Characteristics**

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface** type apply over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. (Continued)

**LM78M06C** Unless otherwise specified:  $V_{IN} = 11\text{V}$ ,  $C_{IN} = 0.33\ \mu\text{F}$ ,  $C_O = 0.1\ \mu\text{F}$ 

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
$V_O$	Output Voltage	$I_L = 350\ \text{mA}$	5.75	6.0	6.25	V	
		$5\ \text{mA} \leq I_L \leq 350\ \text{mA}$	<b>5.7</b>	<b>6.0</b>	<b>6.3</b>		
		$8\text{V} \leq V_{IN} \leq 21\text{V}$					
$V_{R\ LINE}$	Line Regulation	$9\text{V} \leq V_{IN} \leq 20\text{V}$ , $I_L = 200\ \text{mA}$		1.5	50	mV	
		$8\text{V} \leq V_{IN} \leq 25\text{V}$ , $I_L = 200\ \text{mA}$		5	100		
$V_{R\ LOAD}$	Load Regulation	$5\ \text{mA} \leq I_L \leq 200\ \text{mA}$		10	60	mV	
		$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$		20	120		
$I_Q$	Quiescent Current	$I_L = 350\ \text{mA}$		4.5	8.0		
$\Delta I_Q$	Quiescent Current Change	$5\ \text{mA} \leq I_L \leq 350\ \text{mA}$			<b>0.5</b>	mA	
		$9\text{V} \leq V_{IN} \leq 25\text{V}$ , $I_L = 200\ \text{mA}$			<b>0.8</b>		
$V_n$	Output Noise Voltage	$f = 10\ \text{Hz}\text{ to }100\ \text{kHz}$		45		$\mu\text{V}$	
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 2400\ \text{Hz}$ , $I_L = 125\ \text{mA}$	59	80		dB	
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 350\ \text{mA}$		$V_O + 2$		V	
$I_{OS}$	Output Short Circuit Current	$V_{IN} = 35\text{V}$		270		mA	
$I_{PK}$	Output Peak Current			700			
$\frac{\Delta V_O}{\Delta T}$	Average Temperature Coefficient of Output Voltage	$I_L = 5\ \text{mA}$		<b>0.5</b>		$\text{mV}/^\circ\text{C}$	

**Electrical Characteristics**

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface** type apply over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. (Continued)

**LM78M08C** Unless otherwise specified:  $V_{IN} = 14\text{V}$ ,  $C_{IN} = 0.33\ \mu\text{F}$ ,  $C_O = 0.1\ \mu\text{F}$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_O$	Output Voltage	$I_L = 350\ \text{mA}$	7.7	8.0	8.3	V
		$5\ \text{mA} \leq I_L \leq 350\ \text{mA}$ $10.5\text{V} \leq V_{IN} \leq 23\text{V}$	<b>7.6</b>	<b>8.0</b>	<b>8.4</b>	
$V_R$ LINE	Line Regulation	$11\text{V} \leq V_{IN} \leq 20\text{V}$ , $I_L = 200\ \text{mA}$		2	50	mV
		$10.5\text{V} \leq V_{IN} \leq 25\text{V}$ , $I_L = 200\ \text{mA}$		6	100	
$V_R$ LOAD	Load Regulation	$5\ \text{mA} \leq I_L \leq 200\ \text{mA}$		10	80	mV
		$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$		25	160	
$I_Q$	Quiescent Current	$I_L = 350\ \text{mA}$		4.6	8.0	mA
$\Delta I_Q$	Quiescent Current Change	$5\ \text{mA} \leq I_L \leq 350\ \text{mA}$			<b>0.5</b>	
		$10.5\text{V} \leq V_{IN} \leq 25\text{V}$ , $I_L = 200\ \text{mA}$			<b>0.8</b>	
$V_n$	Output Noise Voltage	$f = 10\ \text{Hz}$ to $100\ \text{kHz}$		52		$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 2400\ \text{Hz}$ , $I_L = 125\ \text{mA}$	56	80		$\text{dB}$
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 350\ \text{mA}$			$V_O + 2$	V
$I_{OS}$	Output Short Circuit Current	$V_{IN} = 35\text{V}$		250		mA
$I_{PK}$	Output Peak Current			700		
$\frac{\Delta V_O}{\Delta T}$	Average Temperature Coefficient of Output Voltage	$I_L = 5\ \text{mA}$			<b>0.5</b>	$\text{mV}/^\circ\text{C}$

**Electrical Characteristics**

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface** type apply over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. (Continued)

**LM341-12, LM78M12C** Unless otherwise specified:  $V_{IN} = 19\text{V}$ ,  $C_{IN} = 0.33\ \mu\text{F}$ ,  $C_O = 0.1\ \mu\text{F}$

Symbol	Parameter	Conditions		Min	Typ	Max	Units
$V_O$	Output Voltage	$I_L = 500\ \text{mA}$		11.5	12	12.5	V
		$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$ $P_D \leq 7.5\text{W}, 14.8\text{V} \leq V_{IN} \leq 27\text{V}$		11.4	12	12.6	
$V_R$ LINE	Line Regulation	$14.5\text{V} \leq V_{IN} \leq 30\text{V}$	$I_L = 100\ \text{mA}$			120	mV
			$I_L = 500\ \text{mA}$			240	
$V_R$ LOAD	Load Regulation	$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$				240	
$I_Q$	Quiescent Current	$I_L = 500\ \text{mA}$			4	10.0	mA
$\Delta I_Q$	Quiescent Current Change	$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$				0.5	
		$14.8\text{V} \leq V_{IN} \leq 30\text{V}, I_L = 500\ \text{mA}$				1.0	
$V_n$	Output Noise Voltage	$f = 10\ \text{Hz}$ to $100\ \text{kHz}$			75		$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 120\ \text{Hz}, I_L = 500\ \text{mA}$			71		dB
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 500\ \text{mA}$		14.5			V
$\Delta V_O$	Long Term Stability	$I_L = 500\ \text{mA}$				48	mV/khrs

**LM341-15, LM78M15C** Unless otherwise specified:  $V_{IN} = 23\text{V}$ ,  $C_{IN} = 0.33\ \mu\text{F}$ ,  $C_O = 0.1\ \mu\text{F}$

Symbol	Parameter	Conditions		Min	Typ	Max	Units
$V_O$	Output Voltage	$I_L = 500\ \text{mA}$		14.4	15	15.6	V
		$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$ $P_D \leq 7.5\text{W}, 18\text{V} \leq V_{IN} \leq 30\text{V}$		14.25	15	15.75	
$V_R$ LINE	Line Regulation	$17.6\text{V} \leq V_{IN} \leq 30\text{V}$	$I_L = 100\ \text{mA}$			150	mV
			$I_L = 500\ \text{mA}$			300	
$V_R$ LOAD	Load Regulation	$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$				300	
$I_Q$	Quiescent Current	$I_L = 500\ \text{mA}$			4	10.0	mA
$\Delta I_Q$	Quiescent Current Change	$5\ \text{mA} \leq I_L \leq 500\ \text{mA}$				0.5	
		$18\text{V} \leq V_{IN} \leq 30\text{V}, I_L = 500\ \text{mA}$				1.0	
$V_n$	Output Noise Voltage	$f = 10\ \text{Hz}$ to $100\ \text{kHz}$			90		$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 120\ \text{Hz}, I_L = 500\ \text{mA}$			69		dB
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 500\ \text{mA}$		17.6			V
$\Delta V_O$	Long Term Stability	$I_L = 500\ \text{mA}$				60	mV/khrs

**Electrical Characteristics**

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface** type apply over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. (Continued)

**LM78M24C** Unless otherwise specified:  $V_{IN} = 33\text{V}$ ,  $C_{IN} = 0.33 \mu\text{F}$ ,  $C_O = 0.1 \mu\text{F}$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_O$	Output Voltage	$I_L = 350 \text{ mA}$	23.0	24.0	25.0	V
		$5 \text{ mA} \leq I_L \leq 350 \text{ mA}$ $27\text{V} \leq V_{IN} \leq 38\text{V}$	<b>22.8</b>	<b>24.0</b>	<b>25.2</b>	
$V_R$ LINE	Line Regulation	$28\text{V} \leq V_{IN} \leq 36\text{V}$ , $I_L = 200 \text{ mA}$		5	50	mV
		$27\text{V} \leq V_{IN} \leq 38\text{V}$ , $I_L = 200 \text{ mA}$		10	100	
$V_R$ LOAD	Load Regulation	$5 \text{ mA} \leq I_L \leq 200 \text{ mA}$		10	240	mV
		$5 \text{ mA} \leq I_L \leq 500 \text{ mA}$		30	480	
$I_Q$	Quiescent Current	$I_L = 350 \text{ mA}$		5.0	8.0	mA
$\Delta I_Q$	Quiescent Current Change	$5 \text{ mA} \leq I_L \leq 350 \text{ mA}$			<b>0.5</b>	
		$27\text{V} \leq V_{IN} \leq 38\text{V}$ , $I_L = 200 \text{ mA}$			<b>0.8</b>	
$V_n$	Output Noise Voltage	$f = 10 \text{ Hz to } 100 \text{ kHz}$		170		$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	$f = 2400 \text{ Hz}$ , $I_L = 125 \text{ mA}$ , $V_{IN} = 30\text{V}$	50	70		dB
$V_{IN}$	Input Voltage Required to Maintain Line Regulation	$I_L = 350 \text{ mA}$		$V_O + 2$		V
$I_{OS}$	Output Short Circuit Current	$V_{IN} = 35\text{V}$		240		mA
$I_{PK}$	Output Peak Current			700		
$\frac{\Delta V_O}{\Delta T}$	Average Temperature Coefficient of Output Voltage	$I_L = 5 \text{ mA}$			<b>1.2</b>	mV/ $^\circ\text{C}$

**Note 1:** Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

**Note 2:** The typical thermal resistance of the three package types is:


T (TO-220) package:  $\theta_{(J-A)} = 60 \text{ }^\circ\text{C/W}$ ,  $\theta_{(J-C)} = 5 \text{ }^\circ\text{C/W}$

P (TO-202) package:  $\theta_{(J-A)} = 70 \text{ }^\circ\text{C/W}$ ,  $\theta_{(J-C)} = 12 \text{ }^\circ\text{C/W}$

H (TO-39) package:  $\theta_{(J-A)} = 120 \text{ }^\circ\text{C/W}$ ,  $\theta_{(J-C)} = 18 \text{ }^\circ\text{C/W}$

## Schematic Diagram









NATL SEMICOND (LINEAR)

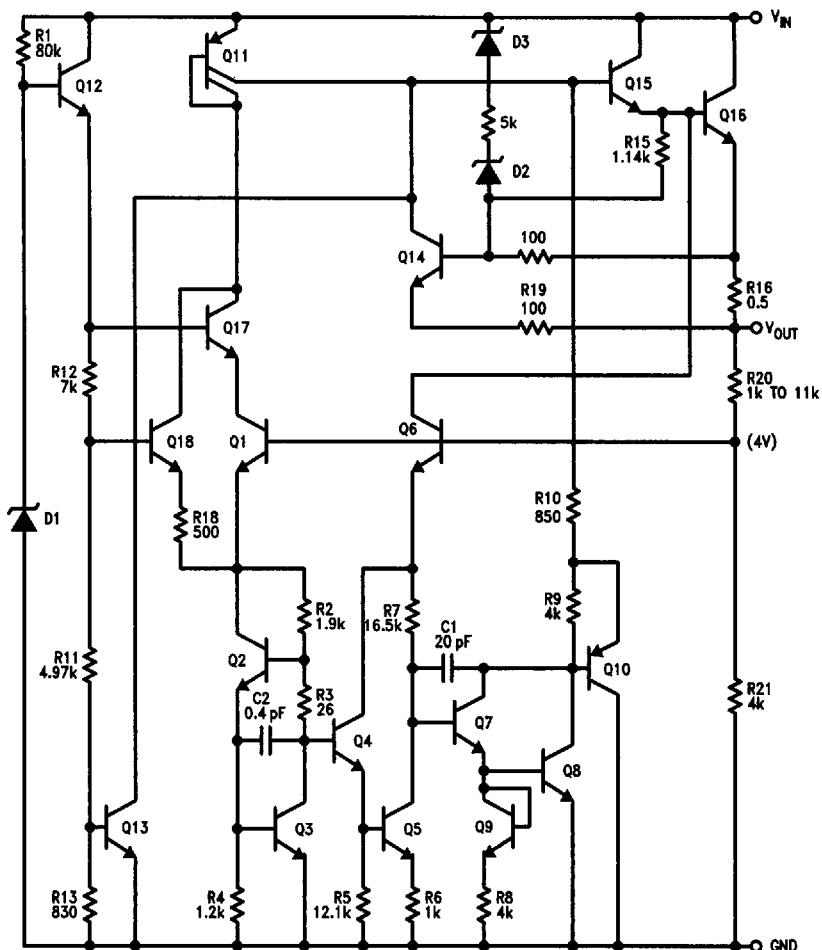

TL/H/10484-1


## Typical Performance Characteristics

NATL SEMICOND (LINEAR)

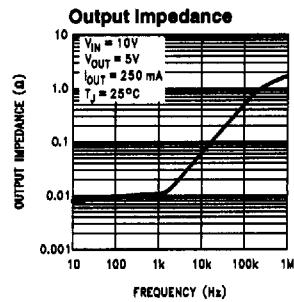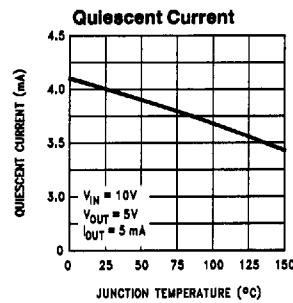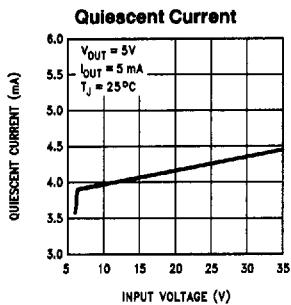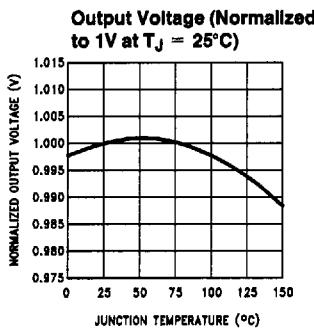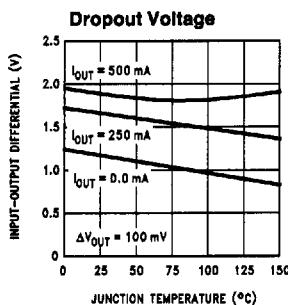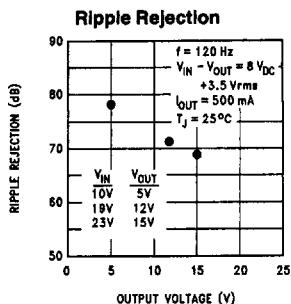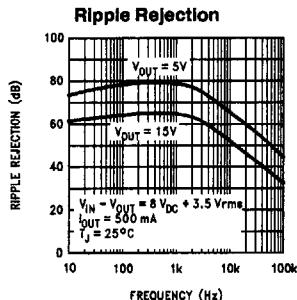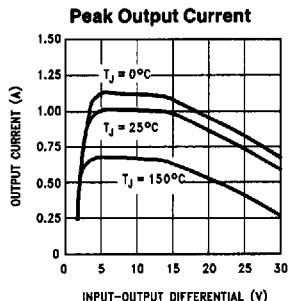


TL/H/10484-4

## Typical Performance Characteristics (Continued)

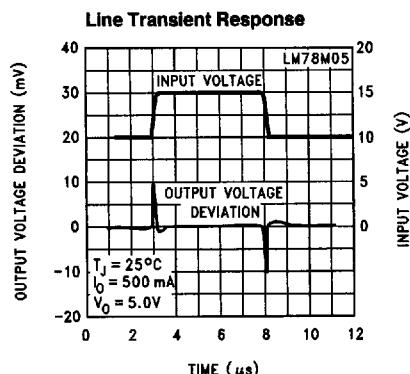

TL/H/10484-7

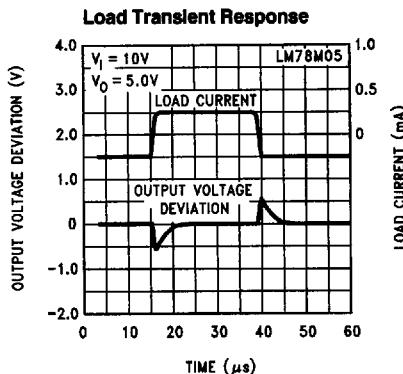


TL/H/10484-8

**Design Considerations**

The LM78MXX/LM341XX fixed voltage regulator series has built-in thermal overload protection which prevents the device from being damaged due to excessive junction temperature.

The regulators also contain internal short-circuit protection which limits the maximum output current, and safe-area protection for the pass transistor which reduces the short-circuit current as the voltage across the pass transistor is increased.

Although the internal power dissipation is automatically limited, the maximum junction temperature of the device must be kept below  $+125^\circ\text{C}$  in order to meet data sheet specifications. An adequate heatsink should be provided to assure this limit is not exceeded under worst-case operating conditions (maximum input voltage and load current) if reliable performance is to be obtained.

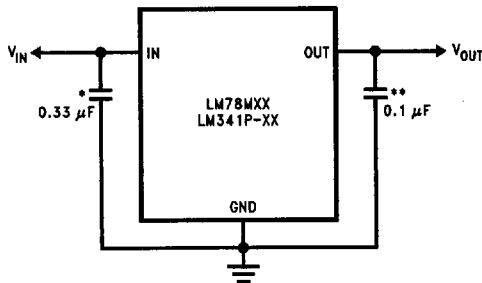**Typical Application**

TL/H/10484-9

\*Required if regulator input is more than 4 inches from input filter capacitor (or no input filter capacitor is used).

\*\*Optional for improved transient response.