

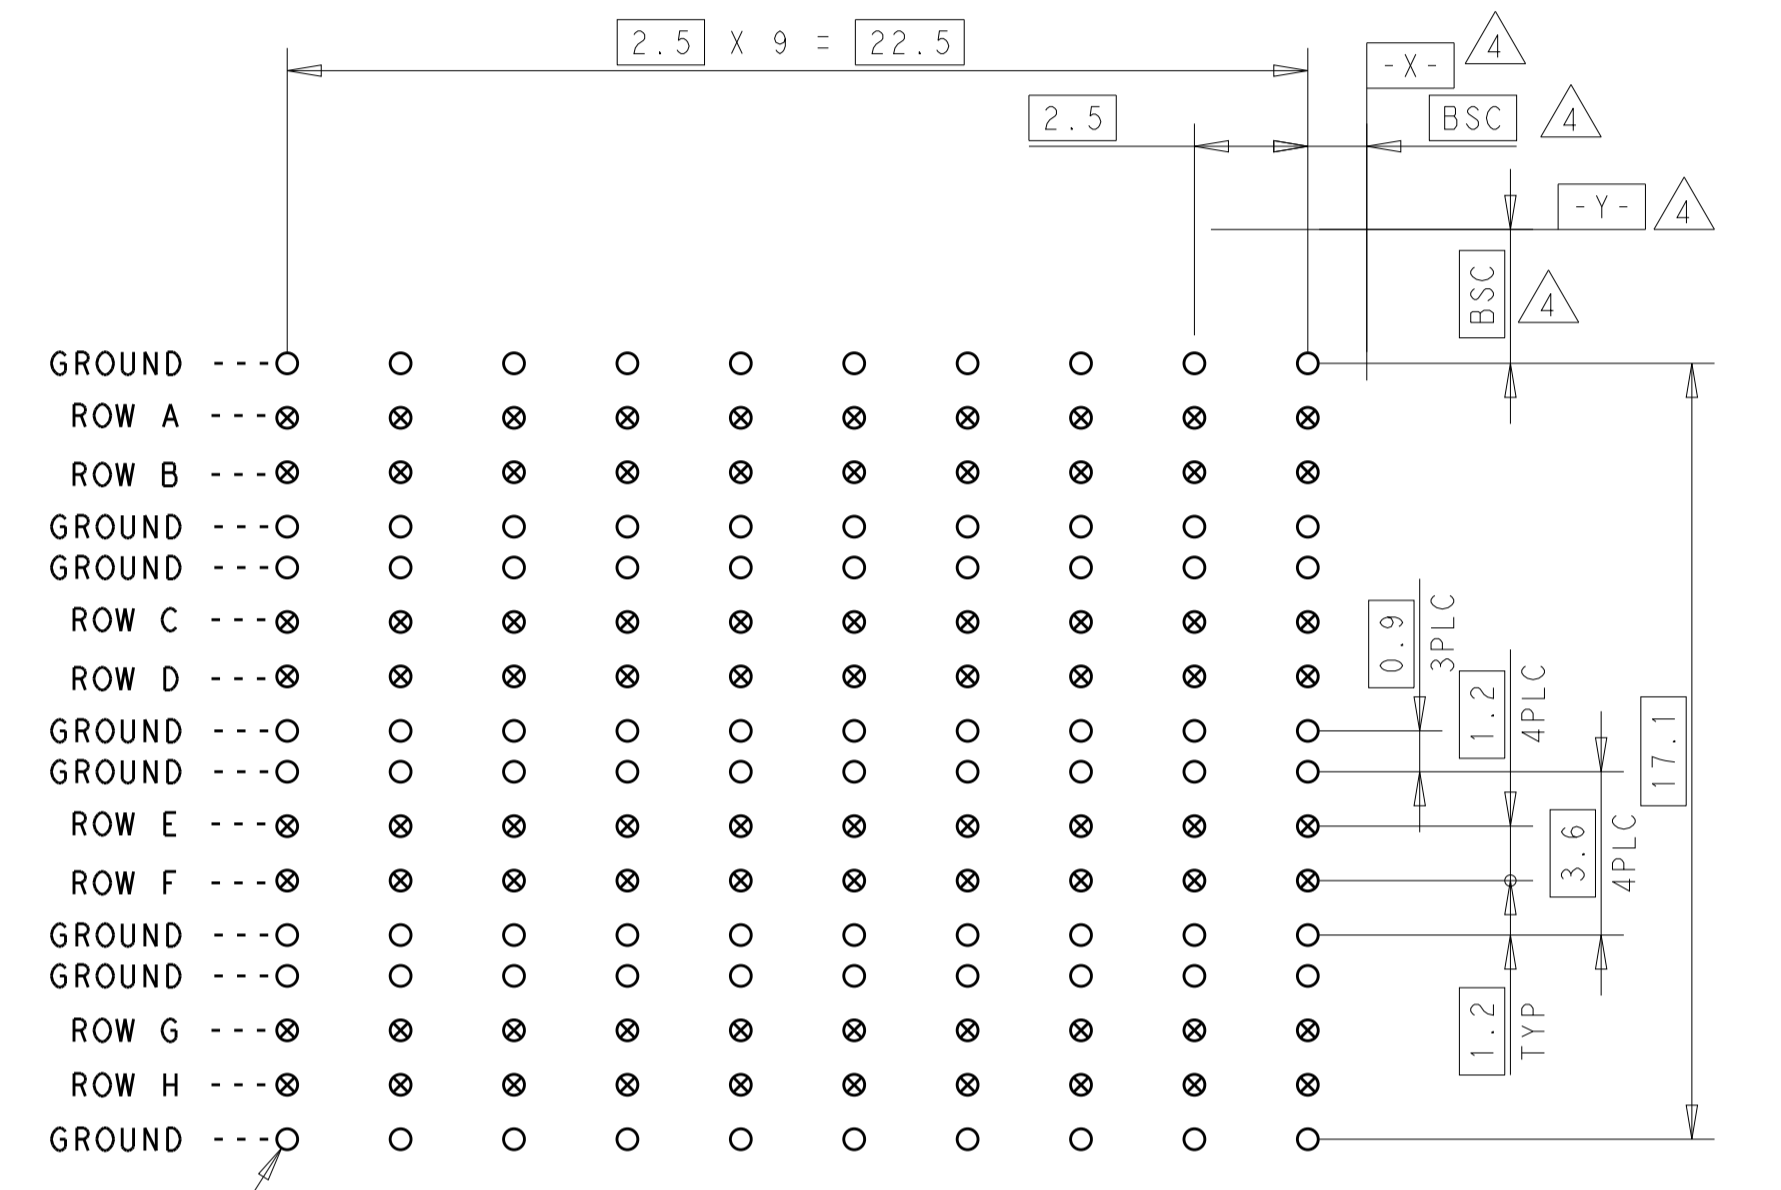
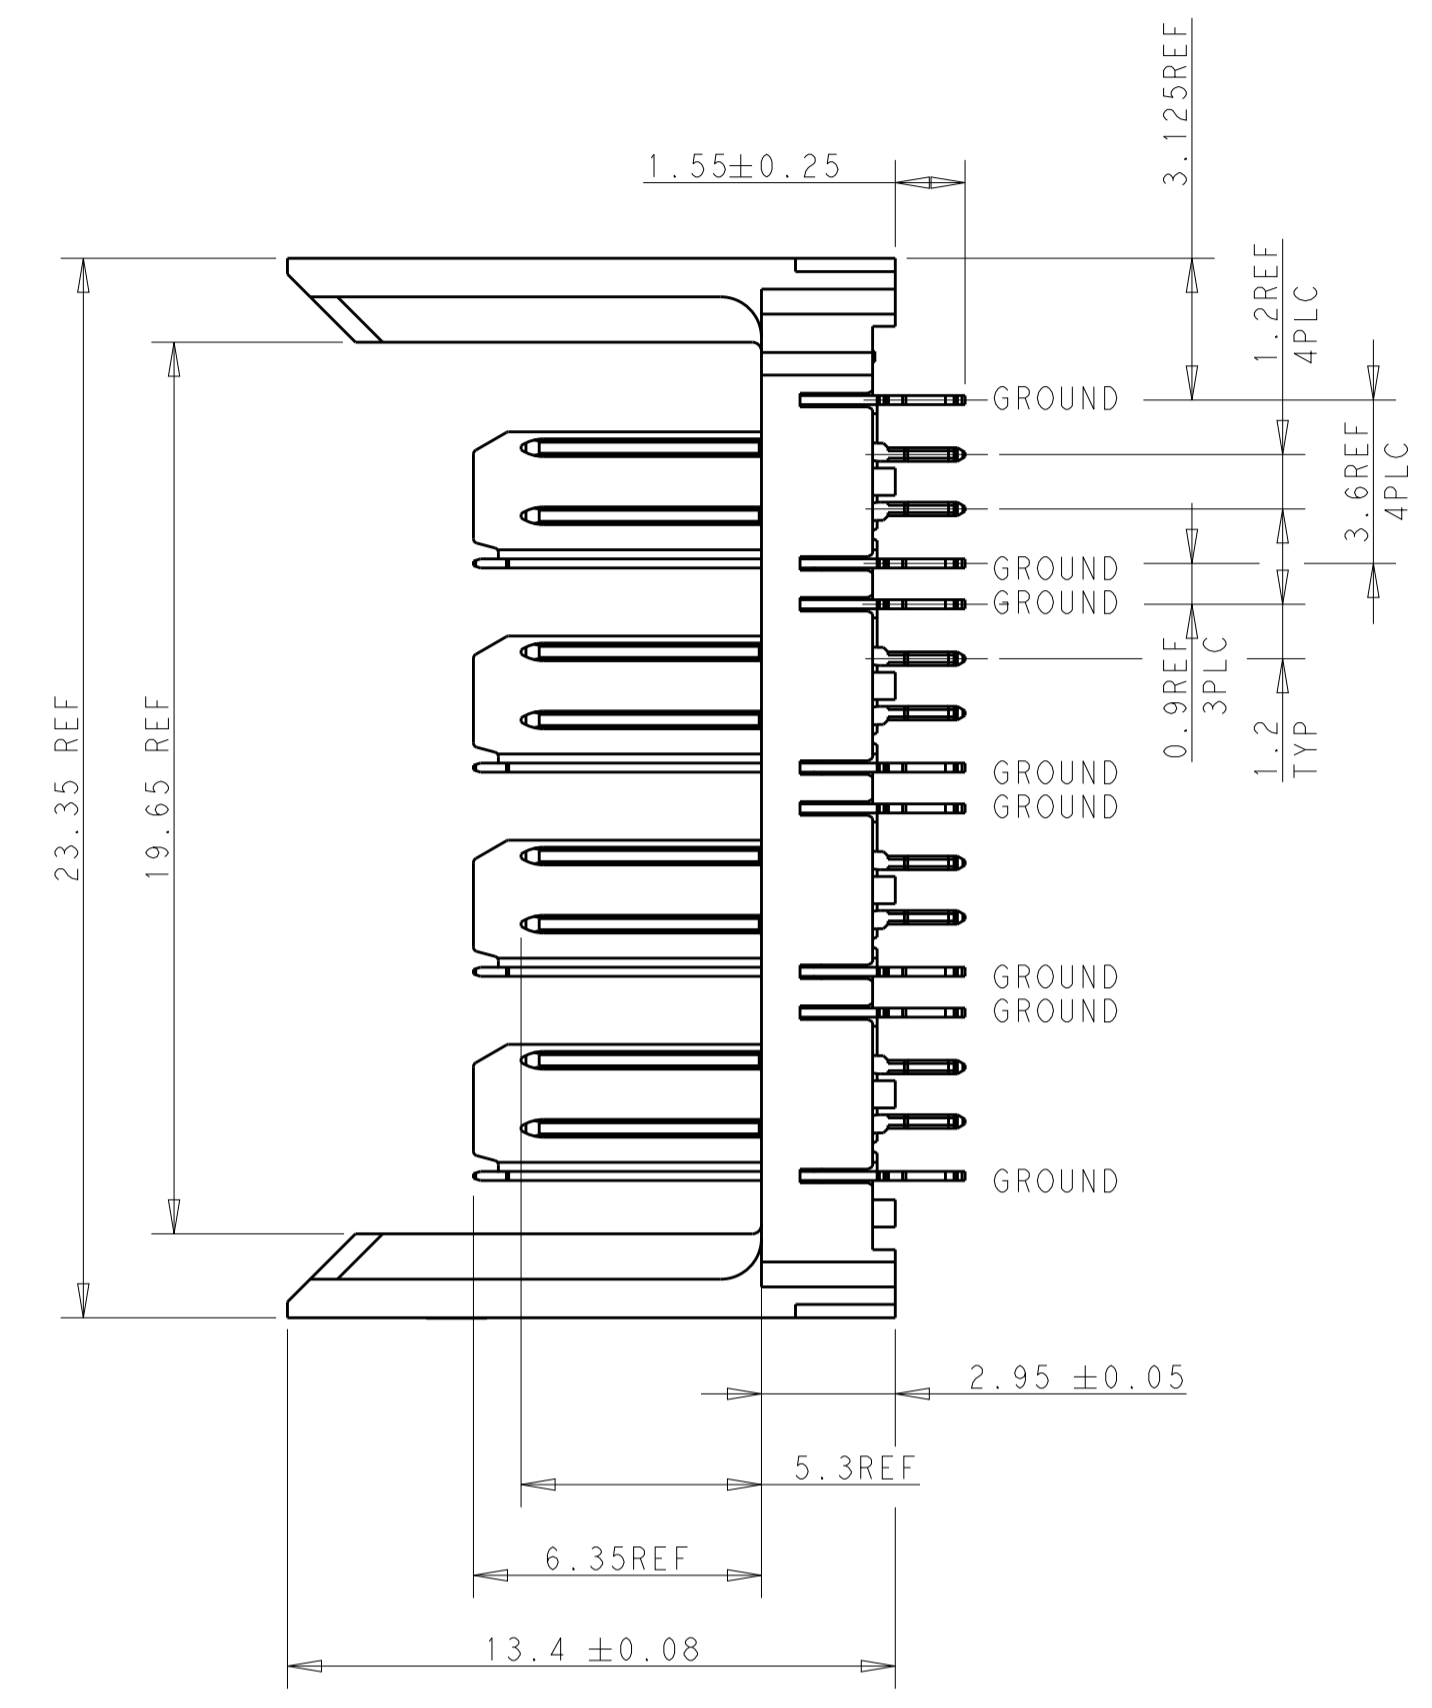


LOC	DIST	REV	DATE	BY	APPD
-	-	A	7JAN2013	D.S.	A.C.
-	-	B	21MAY2013	D.S.	M.Y.
-	-	C	21AUG2015	D.S.	F.Y.
-	-	D	15MAY2018	D.S.	H.L.

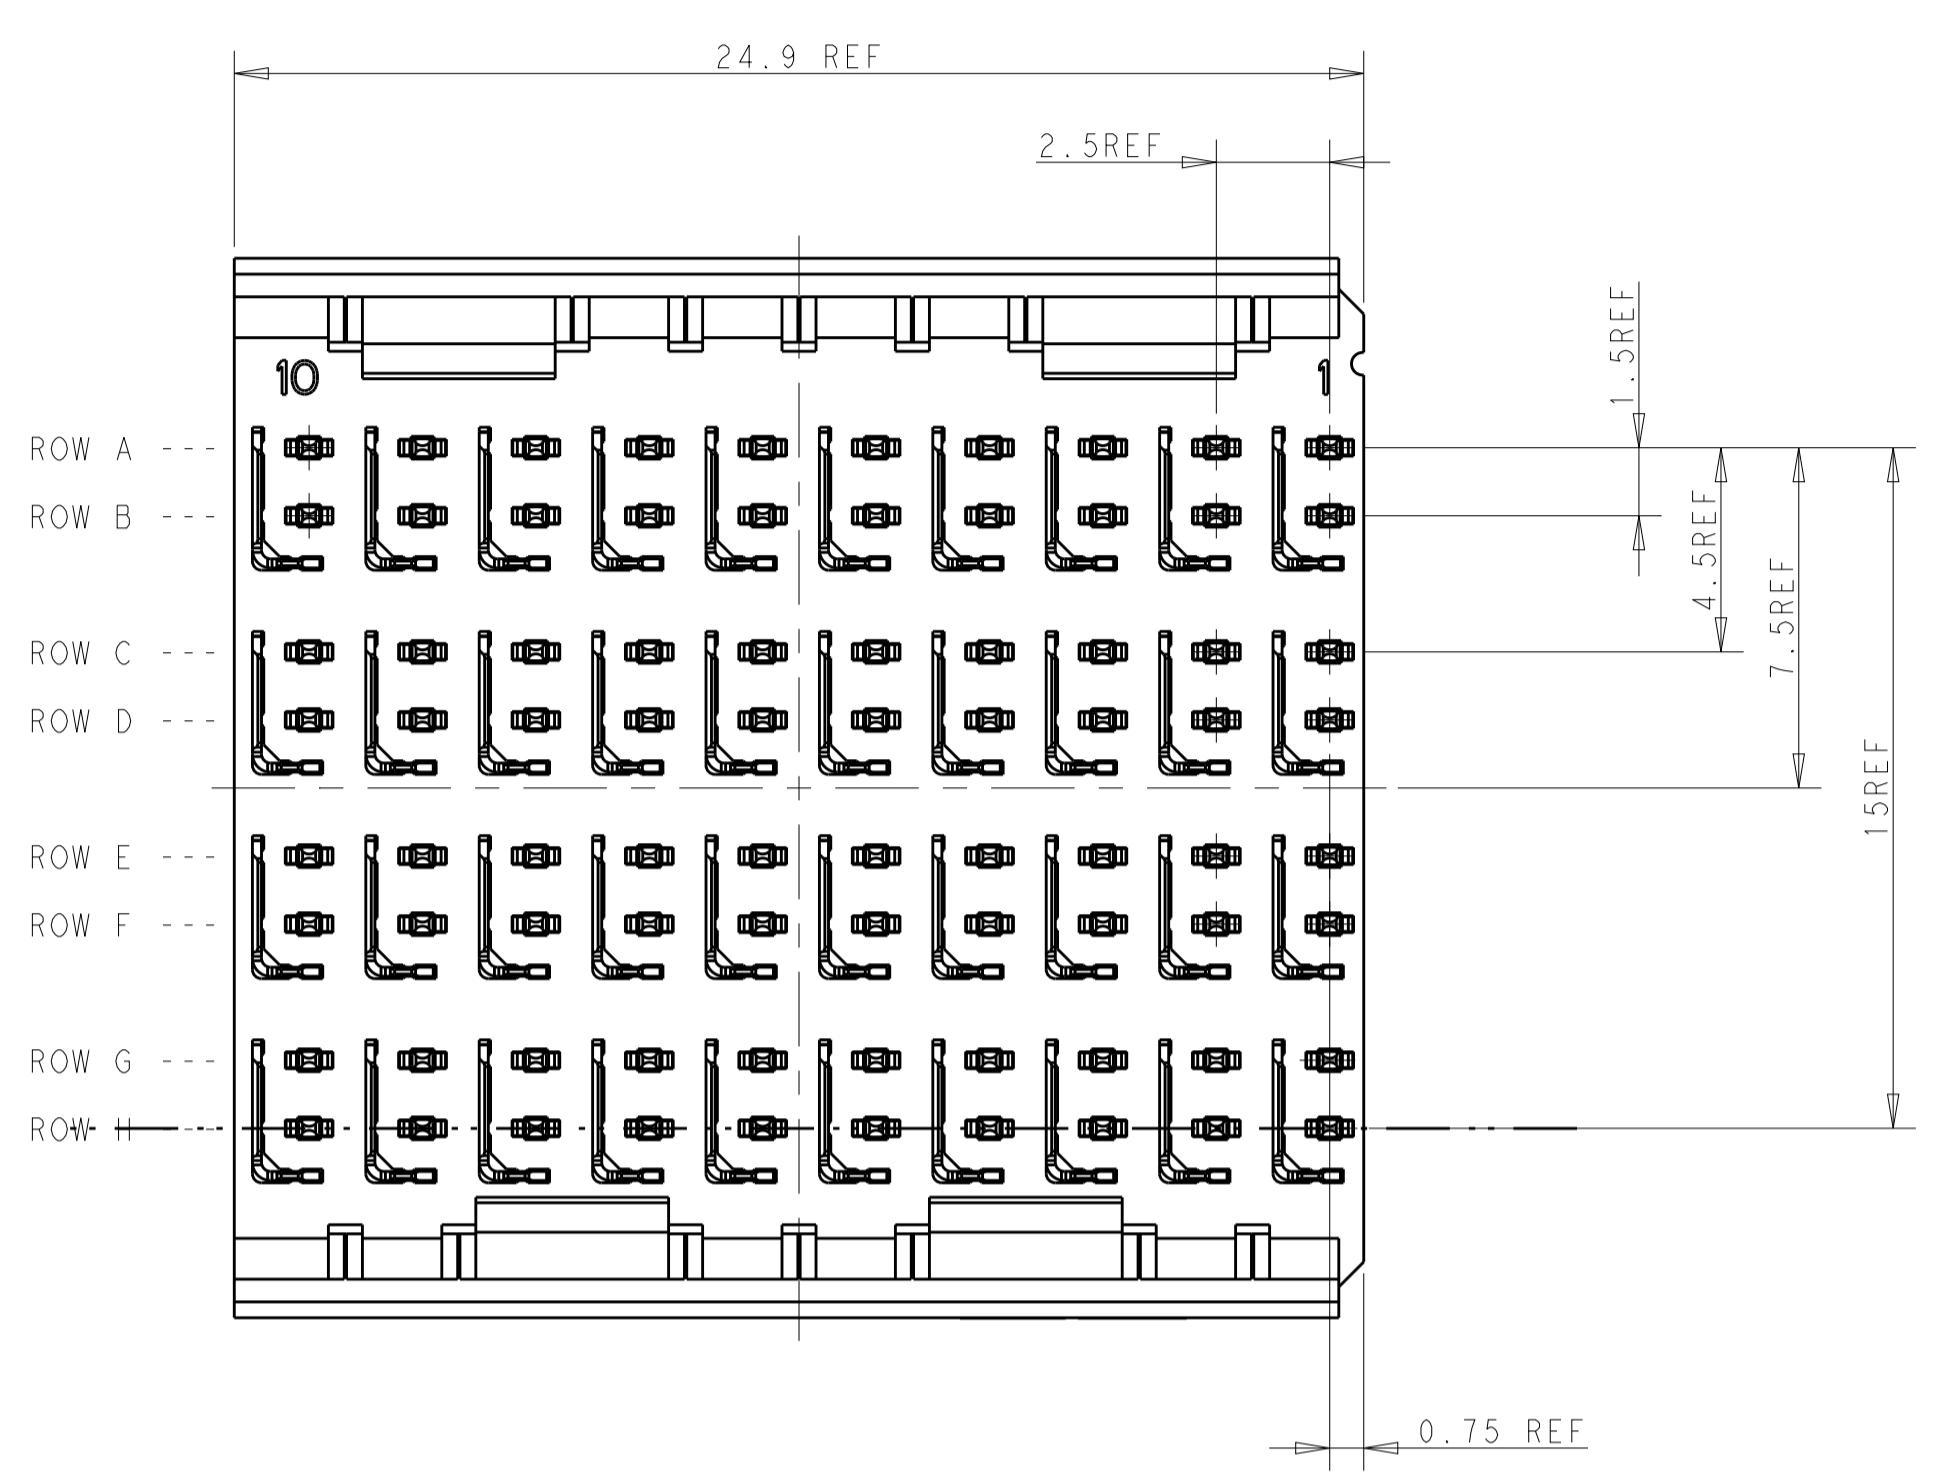

6 Ø0.46 REF  
 Ø0.05 X Y  
 ALL PLATED HOLES.

RECOMMENDED PCB LAYOUT  
 VIEW FROM COMPONENT SIDE  
 SCALE 6:1

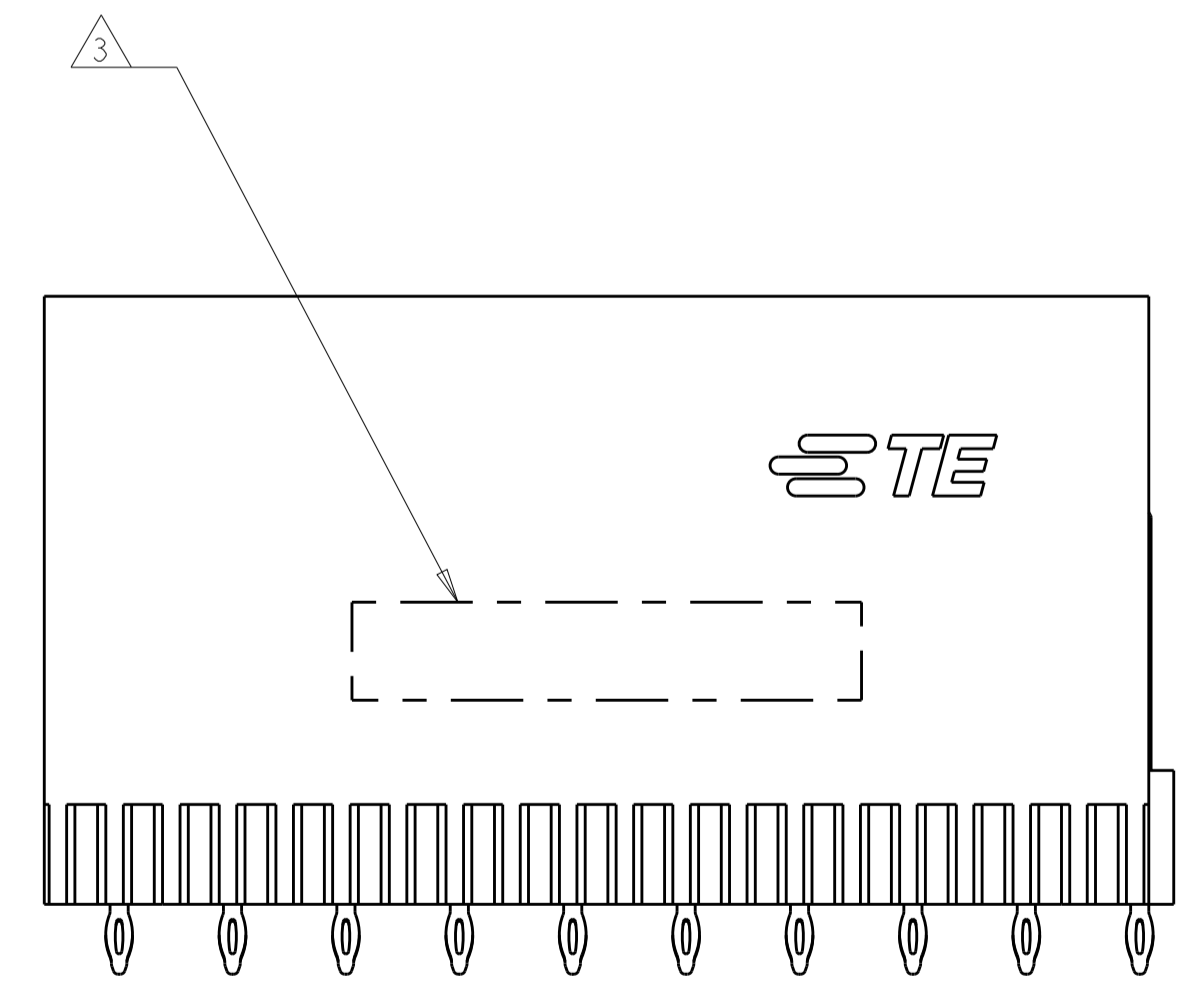

- 1 MATERIAL: CONTACT AND SHIELD: PHOSPHOR BRONZE  
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 um MIN MATTE TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 FINISH: SIGNAL AND GROUND CONTACTS:  
0.76 um MIN. GOLD PLATING  
COMPLIANT PIN AREA: 0.5 um MIN MATTE TIN OVER BASE PLATING
- 6 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 7 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE REFER TO APPLICATION SPEC 114-13059

5	2170330-2
2	2170330-1
FINISH	PART NO.

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-1.25 ±0.20 1.25-2.5 ±0.25 2.5-5.0 ±0.30 5.0-10.0 ±0.40 10.0-25.0 ±0.50 25.0-50.0 ±0.63 50.0-100.0 ±0.80 100.0-250.0 ±1.00 250.0-500.0 ±1.25 500.0-1000.0 ±1.60 FINISH: 1 2		DWN: DAVID SHEN 23APR2012 CHK: SANDERS YAN 23APR2012 APVD: ALEY CAI 23APR2012 PRODUCT SPEC: 108-2055-1 APPLICATION SPEC: 114-13059 WEIGHT: - CUSTOMER DRAWING	NAME: ASSEMBLY DRAWING 4 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER SIZE: A1 CAGE CODE: - DRAWING NO: 2170330 SCALE: 6:1 SHEET: 1 OF 1 REV: D
--	--	---	---