



Crimzon[®] Infrared Microcontrollers

ZLP32300 OTP MCU Family

Z I L O G

Product Brief

PB012008-0506



Product Block Diagram

Watchdog Timer	Up to 32 KB OTP	Power-on reset	
T8 Timer Capture & Transmit	Z8[®] Core	Two Comparators	
T16 Timer Capture & Transmit	Low-Battery Voltage Detection		
237 B RAM	High-Battery Voltage Detection		
Port 0 8 I/O	Port 1 8 I/O	Port 2 8 I/O	Port 3 8 I/O

Features

The key features of ZLP32300 OTP MCU includes:

- 2.0–3.6 V operation
- Low-power consumption—6 mW (typical)
- Three standby modes:
 - STOP—2 μ A (typical)
 - HALT—0.8 mA (typical)
 - Low-voltage reset
- Special architecture to automate generation and reception of complex pulses or signals:
 - One programmable 8-bit counter/timer with two capture registers and two load registers

- One programmable 16-bit counter/timer with one capture register and two reload registers
- Programmable input glitch filter for pulse reception
- Six priority interrupts:
 - Three external
 - Two assigned to counter/timers
 - One low-voltage detection interrupt
- Low-voltage and high-voltage detection flags
- Programmable Watchdog Timer (WDT)
- Power-on reset (POR) circuits
- Two independent comparators with programmable interrupt polarity
- Programmable EPROM options:
 - Port 0: 0–3 pull-up transistors
 - Port 0: 4–7 pull-up transistors
 - Port 1: 0–3 pull-up transistors
 - Port 1: 4–7 pull-up transistors
 - Port 2: 0–7 pull-up transistors
 - EPROM protection
 - WDT enabled at POR


General Description

The ZLP32300 is an OTP-based member of the Crimson MCU family of infrared microcontrollers. With 237 B of general-purpose RAM and up to 32 KB of OTP, ZiLOG's CMOS microcontrollers offer fast executing, efficient use of memory, sophisticated interrupts,

input/output bit manipulation capabilities, automated pulse generation/reception, and internal pull-up transistors. Compatible with ZLR16300 and ZLR32300 mask ROM families.

Block Diagram

Figure 1 illustrates the ZLP32300 OTP MCU functional block diagram.

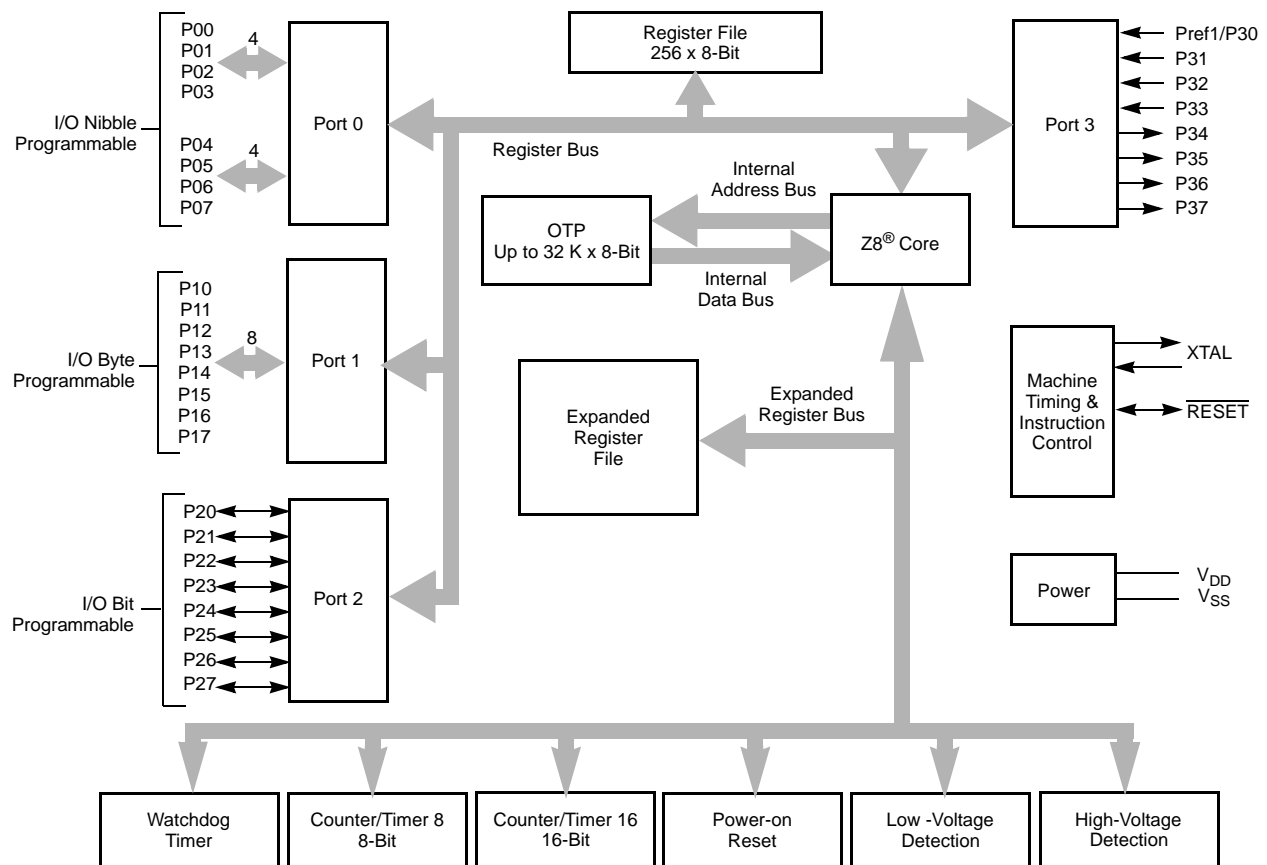

Note: Refer to the specific package for available pins.

Figure 1. ZLP32300 OTP MCU Functional Block Diagram

Pin-Outs

Figure 2 illustrates the pins for the 20-pin ZLP32300 OTP MCU.

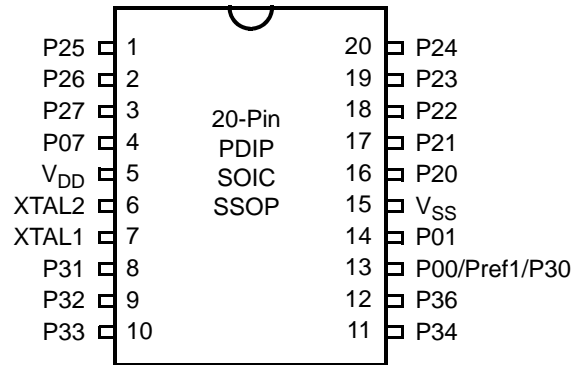


Figure 2. 20-Pin DIP/SOIC/SSOP Pin Assignment

Figure 3 illustrates the pins for the 28-pin ZLP32300 OTP MCU.

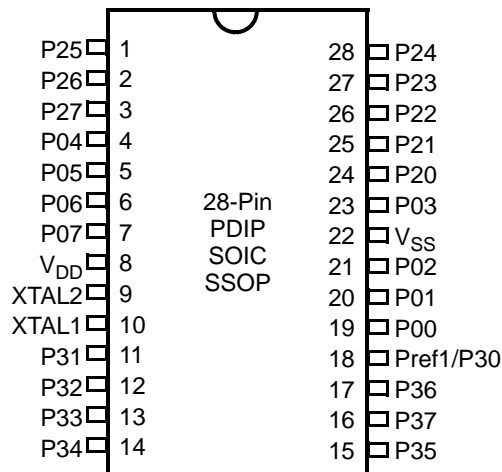


Figure 3. 28-Pin DIP/SOIC/SSOP Pin Assignment



Figure 4 illustrates the 40-pin version of the ZLP32300 OTP MCU.

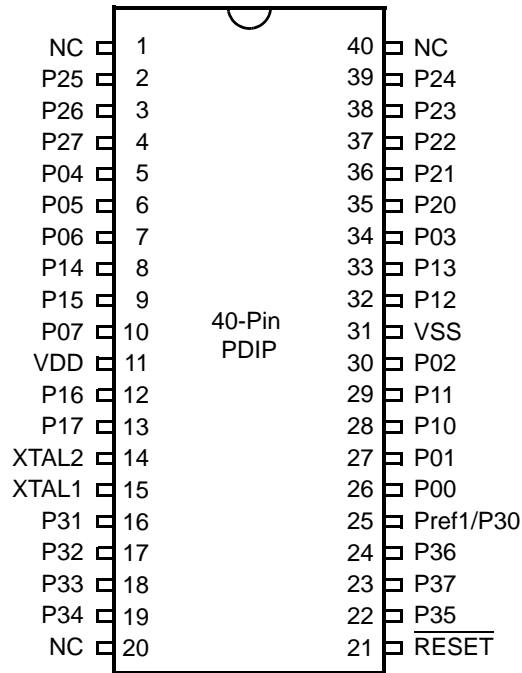


Figure 4. 40-Pin PDIP Pin Assignment



Figure 5 illustrates the 48-pin version of the ZLP32300 OTP MCU.

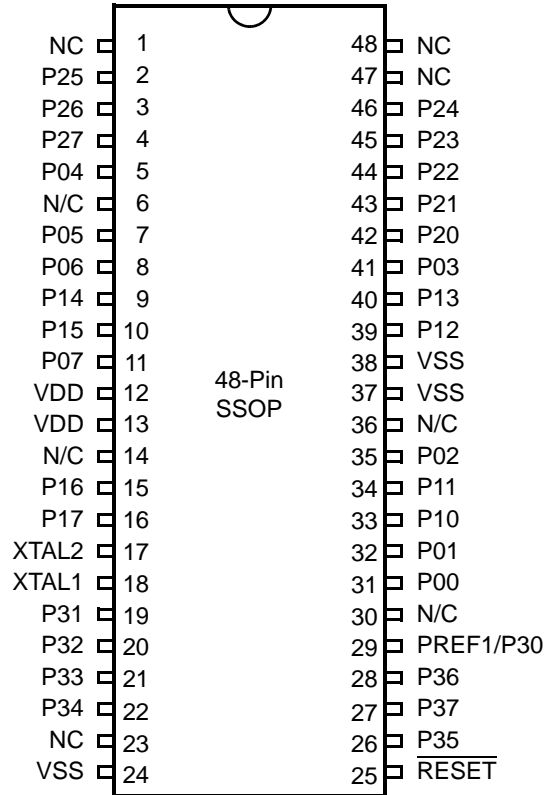


Figure 5. 48-Pin SSOP Assignment



Ordering Information

You can order ZLP32300 OTP MCU products from ZiLOG, using the part numbers provided in the table below. For more information on ordering, please consult your local ZiLOG sales office. The ZiLOG website (www.zilog.com) lists all regional offices, as well as additional ZLP32300 OTP MCU Series product information.

Part Number	Description	Part Number	Description
ZLP32300H4832	48-pin SSOP 32 K OTP	ZLP32300H4808	48-pin SSOP 8 K OTP
ZLP32300P4032	40-pin PDIP 32 K OTP	ZLP32300P4008	40-pin PDIP 8 K OTP
ZLP32300H2832	28-pin SSOP 32 K OTP	ZLP32300H2808	28-pin SSOP 8 K OTP
ZLP32300P2832	28-pin PDIP 32 K OTP	ZLP32300P2808	28-pin PDIP 8 K OTP
ZLP32300S2832	28-pin SOIC 32 K OTP	ZLP32300S2808	28-pin SOIC 8 K OTP
ZLP32300H2032	20-pin SSOP 32 K OTP	ZLP32300H2008	20-pin SSOP 8 K OTP
ZLP32300P2032	20-pin PDIP 32 K OTP	ZLP32300P2008	20-pin PDIP 8 K OTP
ZLP32300S2032	20-pin SOIC 32 K OTP	ZLP32300S2008	20-pin SOIC 8 K OTP
ZLP32300H4816	48-pin SSOP 16 K OTP	ZLP323ICE01ZAC 40-PDIP/48-SSOP Accessory Kit	
ZLP32300P4016	40-pin PDIP 16 K OTP		
ZLP32300H2816	28-pin SSOP 16 K OTP		
ZLP32300P2816	28-pin PDIP 16 K OTP		
ZLP32300S2816	28-pin SOIC 16 K OTP		
ZLP32300H2016	20-pin SSOP 16 K OTP		
ZLP32300P2016	20-pin PDIP 16 K OTP		
ZLP32300S2016	20-pin SOIC 16 K OTP		

Development Tools

The development tool for ZLP32300 OTP MCU includes:

ZLP128ICE01ZEM

In-Circuit Emulator



The product brief contains an overview of the silicon feature set and operating parameters and should not be considered as the final specification. See the product specification for the actual feature set and operating parameters for this product.

This publication is subject to replacement by a later edition. To determine whether a later edition exists, or to request copies of publications, contact:

ZiLOG Worldwide Headquarters

532 Race Street
San Jose, CA 95126
Telephone: 408.558.8500
Fax: 408.558.8300
www.zilog.com

Document Disclaimer

ZiLOG is a registered trademark of ZiLOG Inc. in the United States and in other countries. All other products and/or service names mentioned herein may be trademarks of the companies with which they are associated.

©2006 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Except with the express written approval ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses or other rights are conveyed, implicitly or otherwise, by this document under any intellectual property rights.