### INTEGRATED CIRCUITS

# DATA SHEET

**74F253**Dual 4-bit input multiplexer (3-State)

Product specification

1988 Nov 29

IC15 Data Handbook





74F253

### **FEATURES**

- 3-State outputs for bus interface and multiplex expansion
- Common select inputs
- Separate Output Enable Inputs


### **DESCRIPTION**

The 74F253 has two identical 4-input multiplexers with 3-State outputs which select two bits from four sources selected by common Select inputs (S0, S1). When the individual Output Enable (OEa, OEb) inputs of the 4-input multiplexers are High, the outputs are forced to a high impedance (Hi-Z) state.

The 74F253 is the logic implementation of a 2-pole, 4-position switch; the position of the switch being determined by the logic levels supplied to the two common Select inputs.

To avoid exceeding the maximum current ratings when the outputs of the 3-State devices are tied together, all but one device must be in the high-impedance state. Therefore, only one Output Enable must be active at a time.

### **PIN CONFIGURATION**



TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F253	7.0ns	12mA

### **ORDERING INFORMATION**

	COMMERCIAL RANGE	
DESCRIPTION	V <sub>CC</sub> = 5V ±10%, T <sub>amb</sub> = 0°C to +70°C	PKG DWG #
16-pin plastic DIP	N74F253N	SOT38-4
16-pin plastic SO	N74F253D	SOT109-1


### INPUT AND OUTPUT LOADING AND FAN-OUT TABLE

PINS	DESCRIPTION	74F (U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
I0a-I3a	Port A data inputs	1.0/1.0	20μA/0.6mA
I0b-I3b	Port B data inputs	1.0/1.0	20μA/0.6mA
S0, S1	Common Select inputs	1.0/1.0	20μA/0.6mA
<del>OE</del> a	Port A Output Enable input (active Low)	1.0/1.0	20μA/0.6mA
<del>OE</del> b	Port B Output Enable input (active Low)	1.0/1.0	20μA/0.6mA
Ya, Yb	3-State outputs	150/40	3mA/24mA


#### NOTF:

One (1.0) FAST unit load is defined as:  $20\mu A$  in the High state and 0.6mA in the Low state.

### **LOGIC SYMBOL**



### **IEC/IEEE SYMBOL**




Philips Semiconductors Product specification

# Dual 4-input multiplexer (3-State)

74F253

### **LOGIC DIAGRAM**

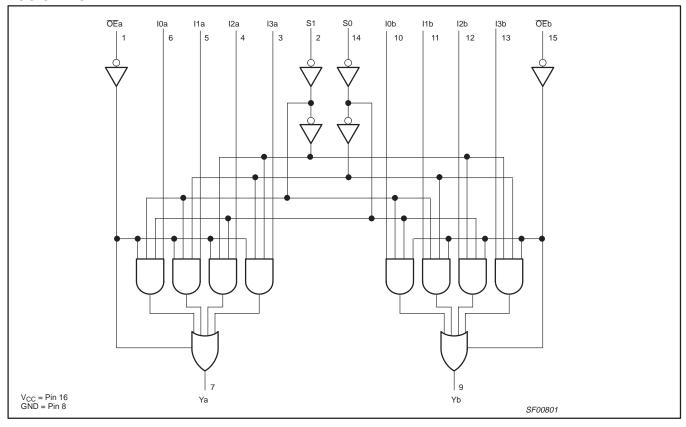

### **FUNCTION TABLE**

			INPUTS			OUTPUT	
S0	S1	10	l1	I2	13	ŌĒ	Υ
Х	Х	Х	Х	Х	Х	Н	Z
L	L	L	Х	Х	Х	L	L
L	L	Н	Х	Х	Х	L	Н
Н	L	Х	L	X	Х	L	L
Н	L	Х	Н	Х	Х	L	Н
L	Н	Х	Х	L	Х	L	L
L	Н	Х	Х	Н	Х	L	Н
Н	Н	Х	Х	Х	L	L	L
Н	Н	Х	Х	Х	Н	L	Н

### NOTES:

H = High voltage level
L = Low voltage level
X = Don't care
Z = High impedance "off" state

Philips Semiconductors Product specification

# Dual 4-input multiplexer (3-State)

74F253

### **ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT
V <sub>CC</sub>	Supply voltage	−0.5 to +7.0	V
V <sub>IN</sub>	Input voltage	-0.5 to +7.0	V
I <sub>IN</sub>	Input current	-30 to +5	mA
V <sub>OUT</sub>	Voltage applied to output in High output state	–0.5 to V <sub>CC</sub>	V
I <sub>OUT</sub>	Current applied to output in Low output state	48	mA
T <sub>amb</sub>	Operating free-air temperature range	0 to +70	°C
T <sub>stg</sub>	Storage temperature	-65 to +150	°C

### **RECOMMENDED OPERATING CONDITIONS**

SYMBOL	DADAMETED		LIMITS						
STWIBUL	PARAMETER	MIN	NOM	MAX	UNIT				
V <sub>CC</sub>	Supply voltage	4.5	5.0	5.5	V				
V <sub>IH</sub>	High-level input voltage	2.0			V				
V <sub>IL</sub>	Low-level input voltage			0.8	V				
I <sub>IK</sub>	Input clamp current			-18	mA				
I <sub>OH</sub>	High-level output current			-3	mA				
I <sub>OL</sub>	Low-level output current			24	mA				
T <sub>amb</sub>	Operating free-air temperature range	0		70	°C				

Philips Semiconductors Product specification

### Dual 4-input multiplexer (3-State)

74F253

### DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

							LIMITS		
SYMBOL	PARAMETE	₹	TEST COND	ITIONS <sup>NO TAG</sup>		MIN	TYP NO TAG	MAX	UNIT
.,	Lligh lovel output voltage		V <sub>CC</sub> = MIN, V <sub>IL</sub> = MAX,	$V_{CC} = MIN, V_{II} = MAX,$ $\pm 10\% V_{CC}$					V
V <sub>OH</sub>	High-level output voltage	;	$V_{IH} = MIN, I_{OH} = MAX$		±5%V <sub>CC</sub>	2.7	3.3		V
.,	I am laval autoritualta ea		$V_{CC} = MIN, V_{II} = MAX,$		±10%V <sub>CC</sub>		0.35	0.50	V
V <sub>OL</sub>	Low-level output voltage		$V_{IH} = MIN, I_{OL} = MAX$	±5%V <sub>CC</sub>		0.35	0.50	V	
V <sub>IK</sub>	Input clamp voltage		$V_{CC} = MIN, I_I = I_{IK}$		-0.73	-1.2	V		
I <sub>I</sub>	Input current at maximur voltage	n input	$V_{CC} = MAX, V_I = 7.0V$			100	μА		
I <sub>IH</sub>	High-level input current		$V_{CC} = MAX, V_I = 2.7V$			20	μΑ		
I <sub>IL</sub>	Low-level input current		$V_{CC} = MAX, V_I = 0.5V$			-0.6	mA		
I <sub>OZH</sub>	Off-state output current High-level voltage applie	d	$V_{CC} = MAX, V_O = 2.7V$					50	μΑ
I <sub>OZL</sub>	Off-state output current Low-level voltage applie	d	$V_{CC} = MAX, V_{O} = 0.5V$	$V_{CC} = MAX, V_{O} = 0.5V$				-50	μА
Ios	Short-circuit output curre	nt <sup>NO</sup> TAG	V <sub>CC</sub> = MAX		-60		-150	mA	
		I <sub>CCH</sub>		OEn=GND, S	Sn=In=4.5V		10	16	mA
I <sub>CC</sub>	Supply current (total) I <sub>CCL</sub>	$V_{CC} = MAX$	OEn=Sn=In=GND		12	23	mA		
		I <sub>CCZ</sub>		OEn=4.5V, S	n=In=GND		14	23	mA

### NOTES:

1. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

All typical values are at V<sub>CC</sub> = 5V, T<sub>amb</sub> = 25°C.
 Not more than one output should be shorted at a time. For testing I<sub>OS</sub>, the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I<sub>OS</sub> tests should be performed last.


74F253

### **AC ELECTRICAL CHARACTERISTICS**


					LIN	MITS		
SYMBOL	PARAMETER	TEST CONDITION		V <sub>CC</sub> = +5V <sub>amb</sub> = +25° C <sub>L</sub> = 50pF R <sub>L</sub> = 500Ω	'	V <sub>CC</sub> = +5 T <sub>amb</sub> = 0°0 C <sub>L</sub> = R <sub>L</sub> =	UNIT	
			MIN	TYP	MAX	MIN	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay In to Yn	Waveform NO TAG	3.0 3.0	4.5 5.0	7.0 7.0	3.0 3.0	7.5 8.0	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay Sn to Yn	Waveform NO TAG	4.5 5.0	7.5 8.5	10.5 11.0	4.5 4.5	11.0 12.0	ns
t <sub>PZH</sub>	Output Enable time to High or Low level	Waveform 2 Waveform 3	3.0 3.0	6.5 6.5	8.0 8.0	3.0 3.0	9.0 9.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable time from High or Low level	Waveform 2 Waveform 3	2.5 2.0	3.5 3.0	5.0 5.0	2.0 1.5	6.0 6.0	ns

### **AC WAVEFORMS**


For all waveforms,  $V_M = 1.5V$ 



Waveform 1. Propagation Deley, Data and Select to Output



Waveform 2. 3-State Output Enable Time to High Level and Output Disable Time from High Level



Waveform 3. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level


1988 Nov 29 6

Philips Semiconductors Product specification

# Dual 4-input multiplexer (3-State)

74F253

### **TEST CIRCUIT AND WAVEFORMS**

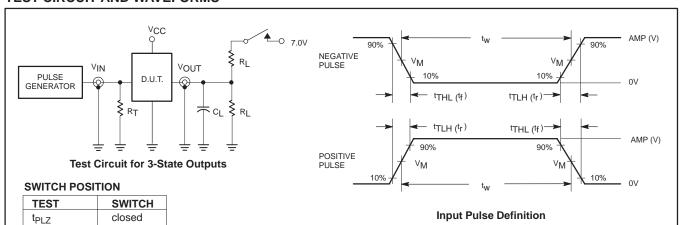

### All other

 $t_{PZL}$ 

**DEFINITIONS:**  $R_L$  = Load resistor;

closed

open

see AC electrical characteristics for value.
Load capacitance includes jig and probe capacitance; see AC electrical characteristics for value.

Termination resistance should be equal to  $Z_{\mbox{\scriptsize OUT}}$  of pulse generators.


family	INP	UT PU	LSE REQU	REMEN	TS	
	amplitude	$V_{\text{M}}$	rep. rate	t <sub>w</sub>	t <sub>TLH</sub>	t <sub>THL</sub>
74F	3.0V 1.5		1MHz	500ns	2.5ns	2.5ns

SF00777

74F253

### DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

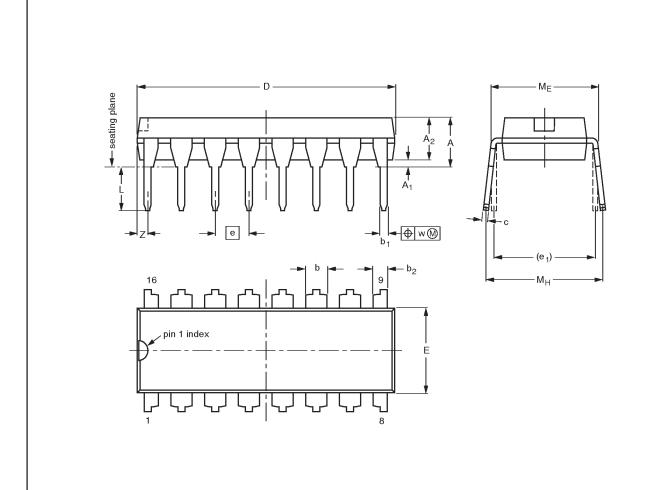

### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A <sub>1</sub> min.	A <sub>2</sub> max.	b	b <sub>1</sub>	b <sub>2</sub>	C	D <sup>(1)</sup>	E <sup>(1)</sup>	е	e <sub>1</sub>	L	ME	Мн	w	Z <sup>(1)</sup> max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	1.25 0.85	0.36 0.23	19.50 18.55	6.48 6.20	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	0.76
inches	0.17	0.020	0.13	0.068 0.051	0.021 0.015	0.049 0.033	0.014 0.009	0.77 0.73	0.26 0.24	0.10	0.30	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.030

10 mm

#### Note


1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE	
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE	
SOT38-4				□ •	<del>92-11-17</del> 95-01-14	

74F253

### SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

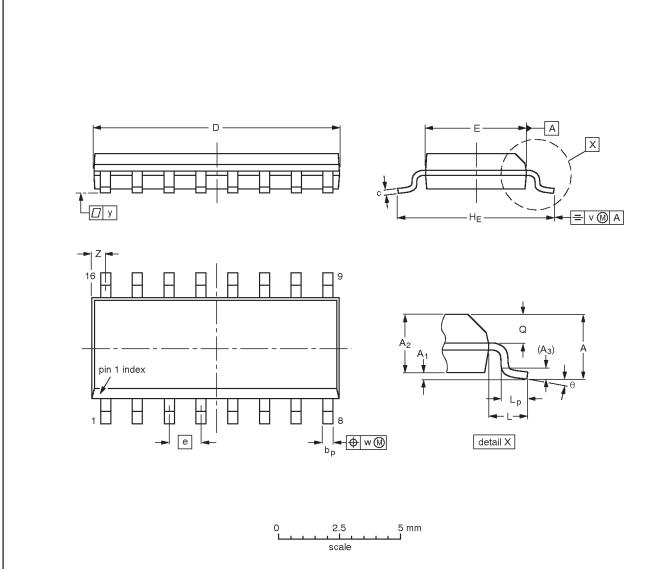

### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

							_											
UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	bp	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Ø	٧	w	у	Z <sup>(1)</sup>	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8°
inches	0.069	0.010 0.004	0.057 0.049	0.01		0.0100 0.0075		0.16 0.15	0.050	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	0°

### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ	PROJECTION	
SOT109-1	076E07S	MS-012AC			<del>95-01-23</del> 97-05-22

Philips Semiconductors Product specification

### Dual 4-input multiplexer (3-State)

74F253

#### Data sheet status

Data sheet status	Product status	Definition [1]	
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.	
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later data. Philips Semiconductors reserves the right to make chages at any time without notice in order to improve design and supply the best possible product.	
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible process.	

<sup>[1]</sup> Please consult the most recently issued datasheet before initiating or completing a design.

#### **Definitions**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### **Disclaimers**

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1998 All rights reserved. Printed in U.S.A.

print code Date of release: 10-98

Document order number: 9397-750-05105

Let's make things better.

Philips Semiconductors



